


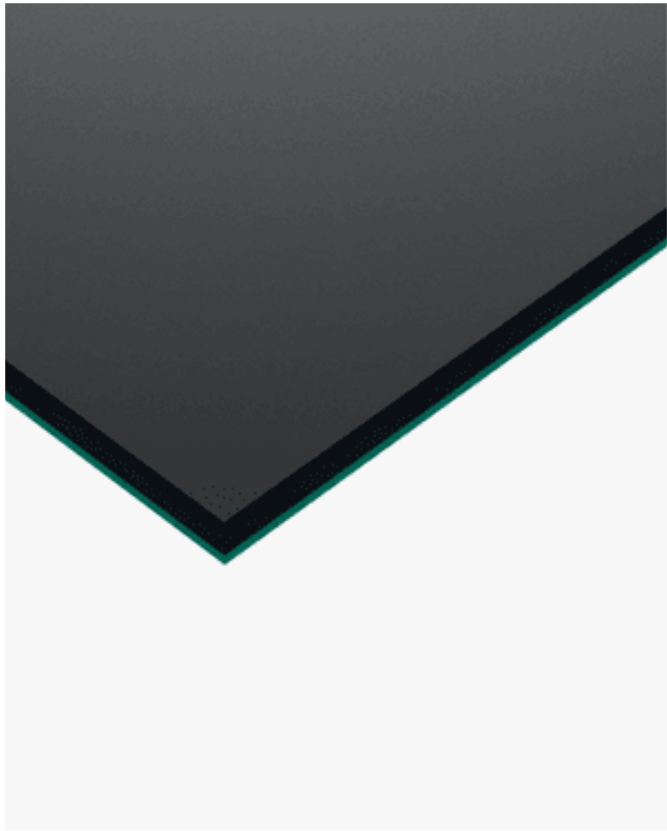

Eleiko Impact Tile, 1000x1000x42 mm, Jet Black

- ✓ Impact isolation
- ✓ Acoustic control
- ✓ Structural protection
- ✓ Modular system

An acoustic flooring system built to control impact at the source. Designed for environments where dropped weights generate noise and vibration, the multi-layer construction isolates energy before it travels through the building. It protects surrounding spaces while maintaining a controlled, high-performance training environment. Engineered for maximum isolation in high-impact, vibration-sensitive environments. The 42 mm construction reduces noise and vibration from repeated impact, making it well-suited for dumbbell areas, bench zones, and strength spaces requiring added control.

Features

- Maximum isolation**
Handles repeated heavy drops with control.
- Advanced acoustic**
Minimises vibration and sound transmission.
- High impact ready**
Designed for barbell and dumbbell drop zones.
- Structural safety**
Protects sensitive building environments.
- Fire classification**
Fire classification for the SVR tiles is Cfl-s2.

Specifications

- | | | | |
|---|--------------------------------------|--------------------------------------|-------------------------------------|
| Unit of measurement
Sold individually | Article code
300508-92 | Length
1000 mm / 39.37 in. | Width
1000 mm / 39.37 in. |
| Weight
25 kg / 55.12 lbs | Fire classification
Cfl-s2 | | |